


□ BELO_GI_70/110 SUSPENDED



ARCHILIGHT

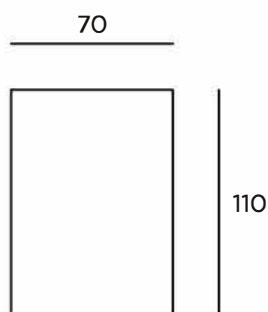

INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

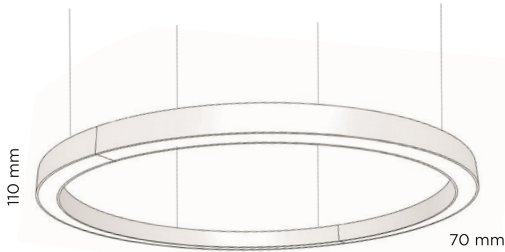

700 mm
900 mm
1200 mm
1500 mm
2000 mm
3000 mm
4000 mm
5000 mm
6000 mm

COLOR TEMPERATURE

3000K /3K
4000K /4K


OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

Delivered incl. 2 m self-locking suspensions

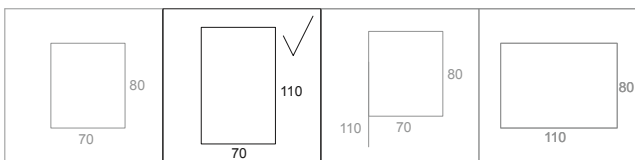

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/110/GI700	700	29	4690/4970
SBS/110/GI900	900	37	6030/6390
SBS/110/GI1220	1200	50	8040/8520
SBS/110/GI1500	1500	66	10720/11360
SBS/110/GI2000	2000	82	13400/14200
SBS/110/GI3000	3000	132	21440/22720
SBS/110/GI4000	4000	164	26800/28400
SBS/110/GI5000	5000	230	37520/39760
SBS/110/GI6000	6000	263	42880/45400

DIRECT/ INDIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/110/GI700	700	29	4690/4970
SBS/110/GI900	900	37	6030/6390
SBS/110/GI1220	1200	50	8040/8520
SBS/110/GI1500	1500	66	10720/11360
SBS/110/GI2000	2000	82	13400/14200
SBS/110/GI3000	3000	132	21440/22720
SBS/110/GI4000	4000	164	26800/28400
SBS/110/GI5000	5000	230	37520/39760
SBS/110/GI6000	6000	263	42880/45400

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	SPPKBO3075 (3X0,75)
	SPPKBO5075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX



Detail of indirect part