


□ BELO_GI_70/80 ACOUSTIC CEILING



ARCHILIGHT



INSTALLATION

Ceiling version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION



Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered dimmable (touch. Dim, DALI)

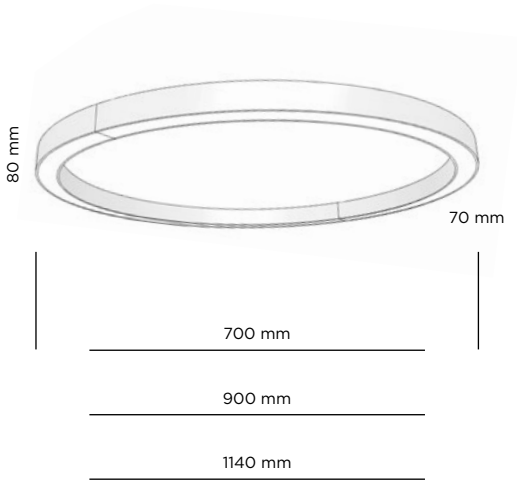

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI /DALI
SWITCH DIMMABLE /SWD
WIRELESS DIMMABLE /WRS

DIRECT CODE	Ø (mm)	W	Lm (light source) 3000K/4000K
SBC/ACU/GI700	700	29	4690/4970
SBC/ACU/GI900	900	37	6030/6390
SBC/ACU/GI1140	1140	50	8040/8520

COLORS OF THE LIGHT FIXTURE

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

COLORS OF THE ACOUSTIC MATERIAL

	WHITE	/WH
	BLACK	/BL
	GREY	/GR
	ANTRACIT	/AT

OTHER ACOUSTIC MATERIAL COLOURS ON REQUEST

