


□ BELO_GI_70/80 ACOUSTIC SUSPENDED



ARCHILIGHT



INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / Passive indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered dimmable (touch. Dim, DALI)

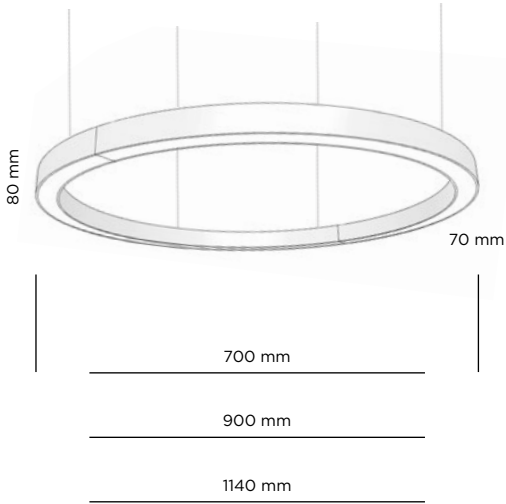

DIRECT CODE	Ø (mm)	W	Lm (light source) 3000K/4000K
SBS/ACU/GI700	700	29	4690/4970
SBS/ACU/GI900	900	37	6030/6390
SBS/ACU/GI1140	1140	50	8040/8520

COLORS OF THE LIGHT FIXTURE

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

COLOR TEMPERATURE

3000K	/3K
4000K	/4K


OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI	/DALI
SWITCH DIMMABLE	/SWD
WIRELESS DIMMABLE	/WRS

Delivered incl. 2m self locking suspensions



COLORS OF THE ACOUSTIC MATERIAL

	WHITE	/WH
	BLACK	/BL
	GREY	/GR
	ANTRACIT	/AT

OTHER ACOUSTIC MATERIAL COLOURS ON REQUEST

ACCESSORIES

	SPPKBO3075 (3X0,75)
	SPPKBO5075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX

