


□ BELO_BE_50 SUSPENDED



ARCHILIGHT

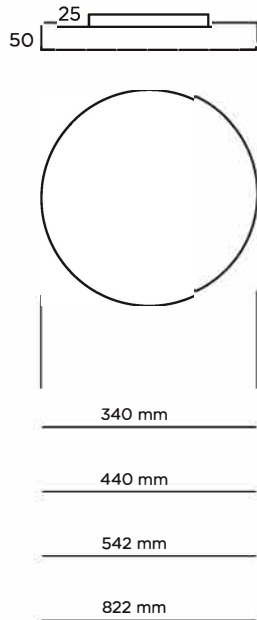

INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/50/BE300	340	17	2680/2820
SBS/50/BE440	440	18	3020/3170
SBS/50/BE542	542	36	6120/6380
SBS/50/BE822	822	64	11980/13320

DIRECT/INDIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/50/BE300/DI	340	17	2680/2820
SBS/50/BE440/DI	440	18	3020/3170
SBS/50/BE542/DI	542	36	6120/6380
SBS/50/BE822/DI	822	64	11980/13320

Delivered incl. 2 m self-locking suspensions



COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

80 SPPKBO3075 (3X0,75)
SPPKBO5075 (5X0,75)
TRANSPARENT CABLE 2 METRES WITH CEILING BOX
125