

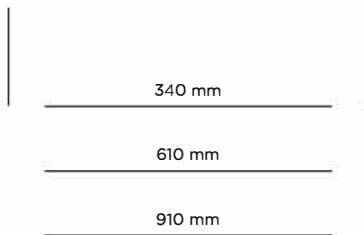


□ BELO_BE_SQ_80 RECESSED

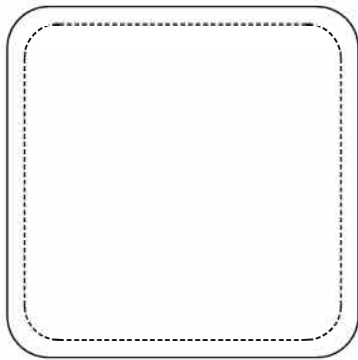



| DIRECT CODE | (mm) | W | Lm from 3000K/4000K |
|---------------|------------|----|---------------------|
| SBV/BE/SQ/330 | 340x340x90 | 8 | 1340/1400 |
| SBV/BE/SQ/600 | 610x610x90 | 32 | 5360/5600 |
| SBV/BE/SQ/900 | 910x910x90 | 72 | 11160/12600 |

INSTALLATION

Recessed version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

COLORS

| | | |
|--|----------|-----|
| | WHITE | /WH |
| | BLACK | /BL |
| | SILVER | /SI |
| | ANTRACIT | /AT |
| | GOLD | /GL |
| | BRONZE | /BR |