


□ BELO_BE_RECESSED



120

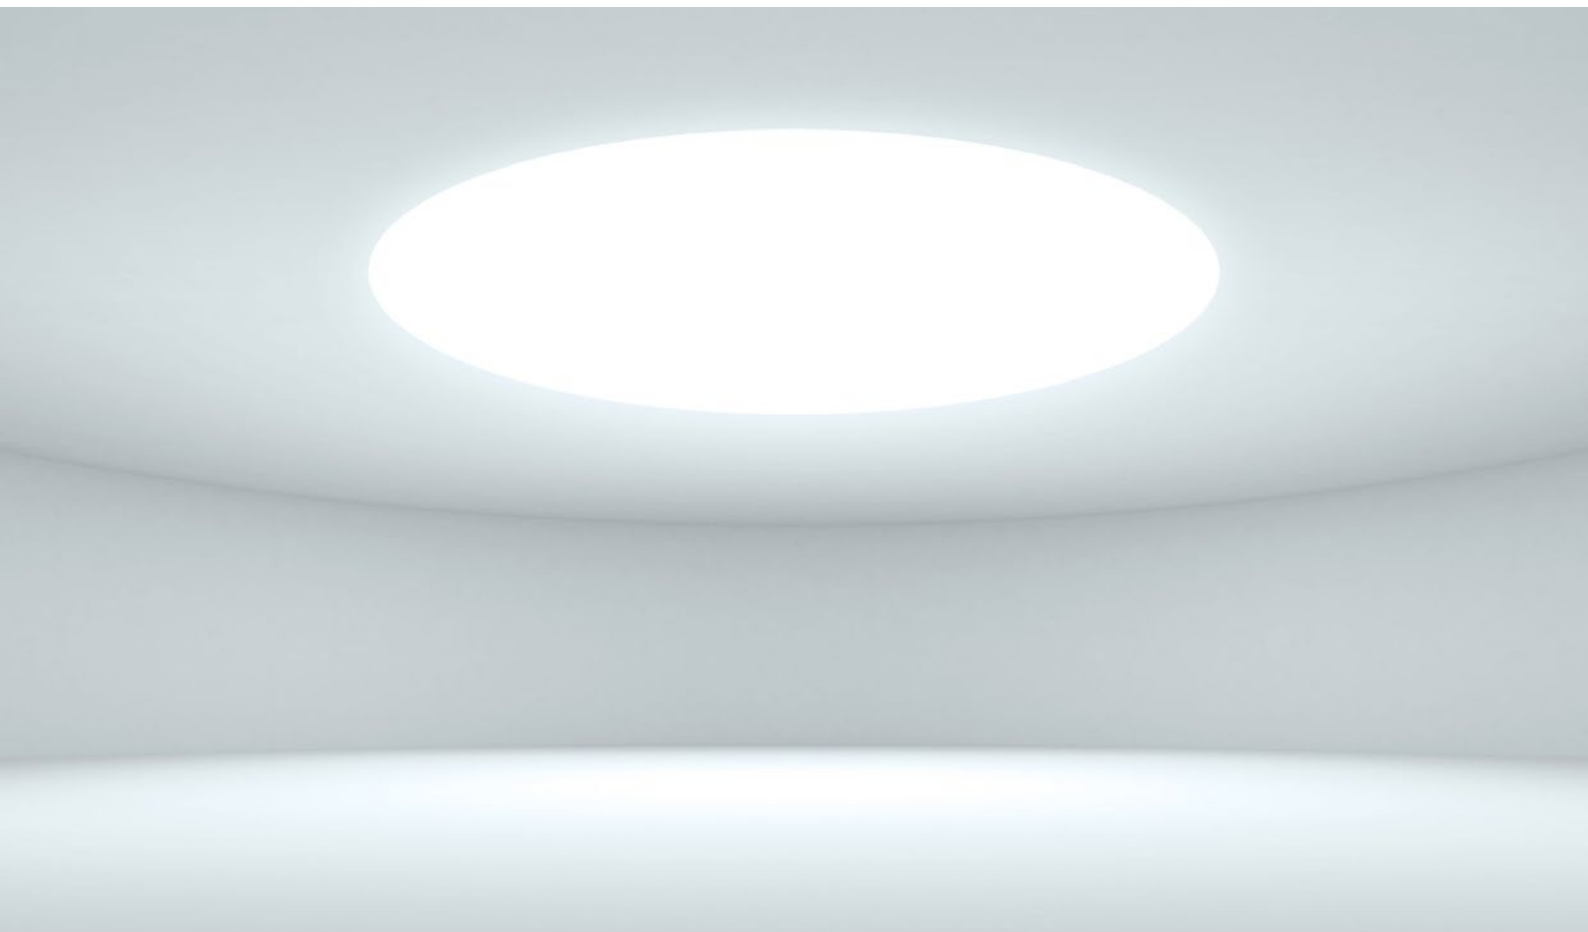

INSTALLATION

- › recessed

CONNECTION

- › 3 - pole terminal block (non DIM)
- › 5 - pole terminal block (DIM)

MATERIAL

- › curved extruded aluminium

FINISHING

- › powder coated

LIGHT SOURCE

- › LED Tridonic, min. 160Lm/W

COLOUR TEMPERATURE

- › 3000K
- › 4000K

DIFFUSER

- › PMMA acryl satine

LIGHT DISTRIBUTION

- › direct symmetrical

MATERIAL COLOUR

- › white
- › silver
- › black
- › another colours on request

CONTROL


- › non DIM
- › switchDIM
- › DALI

ACCESSORIES

- › installation fittings

□ BELO_BE_RECESSED

		Belo_BE_Recessed			
		CODE	W	Lm 3000 K / 4000 K	
120	<p>Ø 378 Ø 388 Ø 381</p>	SBV/BE380/LED/4K/WH	18	2550 / 2700	
120	<p>Ø 453 Ø 463 Ø 456</p>	SBV/BE455/LED/4K/WH	25	2950 / 3040	
120	<p>Ø 593 Ø 603 Ø 596</p>	SBV/BE600/LED/4K/WH	48	7360 / 7720	
120	<p>Ø 873 Ø 883 Ø 876</p>	SBV/BE870/LED/4K/WH	65	9680 / 10120	

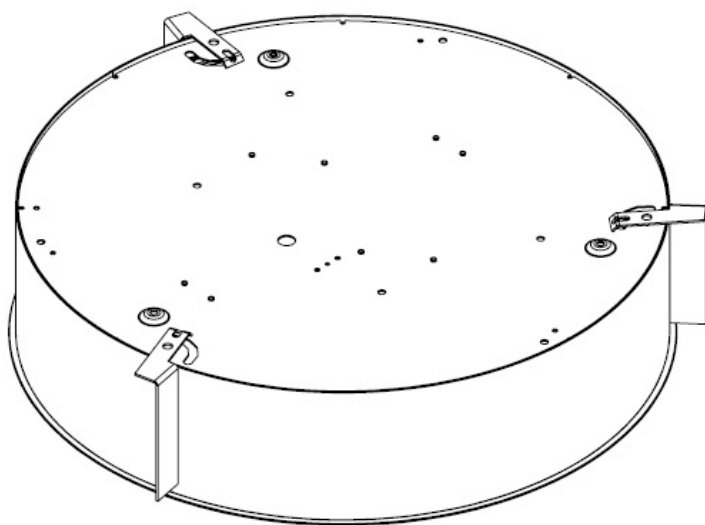

EXAMPLE OF COMPLETE CODE:

- SBV/BE455/4K/WH/DALI
- › 455 diameter
 - › 4K 4000K, 3K 3000K
 - › WH white, BL black, SI silver
 - › DALI dali, SDIM switchdim