


# □ BELO\_GI\_37C/80 SUSPENDED



ARCHILIGHT

37

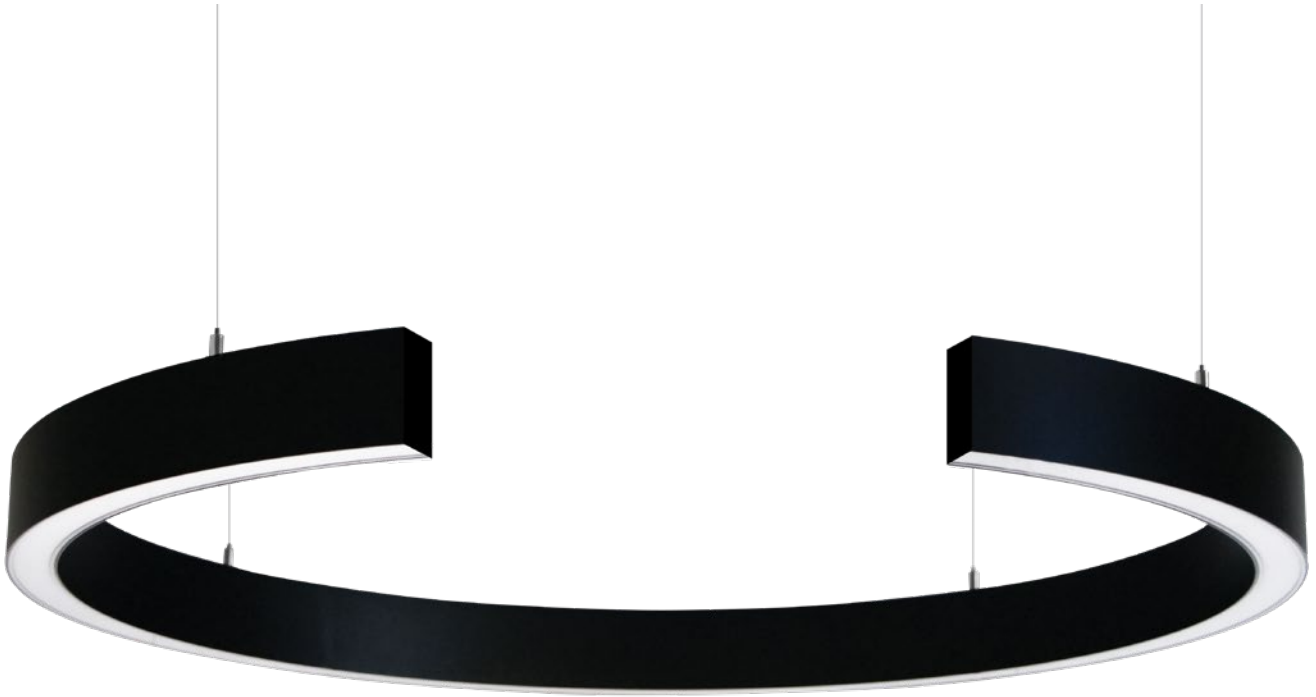

80

## INSTALLATION

Suspended version

## CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block  
Luminaires for dimming are delivered with 5-pole terminal block

## MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

## LIGHT SOURCE

LED 3000K or 4000K

## DIFFUSER

PMMA OPAL  
PRISMATIC

## LIGHT DISTRIBUTION


Direct symmetrical

## EMERGENCY LIGHTING

A unit with integrated emergency is an option

## DIMMING

Most models can be delivered dimmable (touch. Dim, DALI)

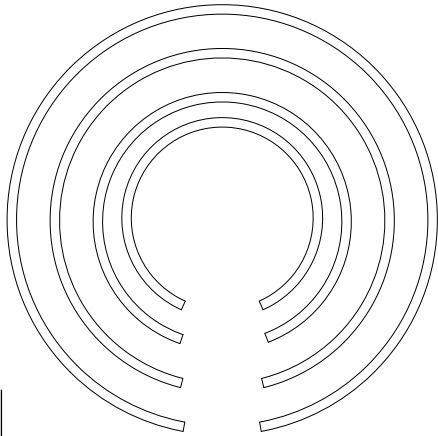

700 mm

900 mm

1250 mm

1500 mm

#### COLOR TEMPERATURE

3000K /3K  
4000K /4K


#### OPTIC

PMMA OPAL /--  
PRISMATIC /P

#### DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI  
WIRELESS /WRS

Delivered incl. 2m self locking suspensions




DIRECT CODE	Ø (mm)	W	Lm (light source) 3000K/4000K
SBS/37C/GI700	700	50	7400/7200
SBS/37C/GI900	900	65	9530/9310
SBS/37C/GI1250	1250	94	13820/13400
SBS/37C/GI1500	1500	115	16900/16250

#### COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

#### ACCESSORIES



SPPKBS3075 (3X0,75)  
SPPKBS5075 (5X0,75)  
TRANSPARENT CABLE 2 METRES  
WITH CEILING BOX

