


□ BELO_GI_70/110L SUSPENDED



ARCHILIGHT



INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION



Direct symmetrical
Direct symmetrical / passive indirect
symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)

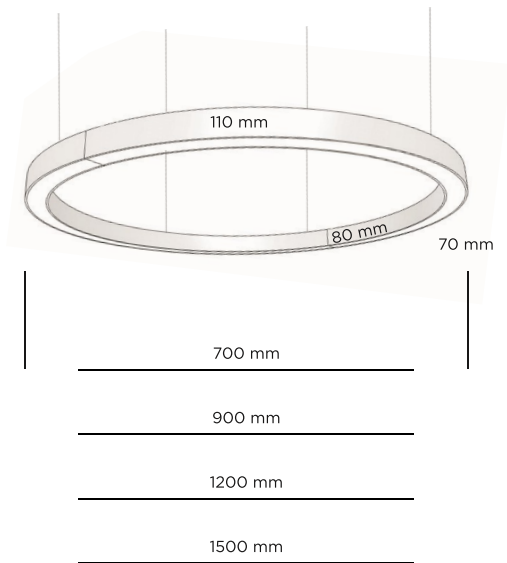

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

Delivered incl. 2 m self-locking suspensions



DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/110L/GI700	700	29	4690/4970
SBS/110L/GI900	900	37	6030/6390
SBS/110L/GI1220	1200	50	8040/8520
SBS/110L/GI1500	1500	66	10720/11360

DIRECT/INDIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/110L/GI700	700	29	4690/4970
SBS/110L/GI900	900	37	6030/6390
SBS/110L/GI1220	1200	50	8040/8520
SBS/110L/GI1500	1500	66	10720/11360

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	SPPKBO3075 (3X0,75)
	SPPKBO5075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX