


□ BELO_GI_70/80 SUSPENDED



ARCHILIGHT



INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / Passive indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

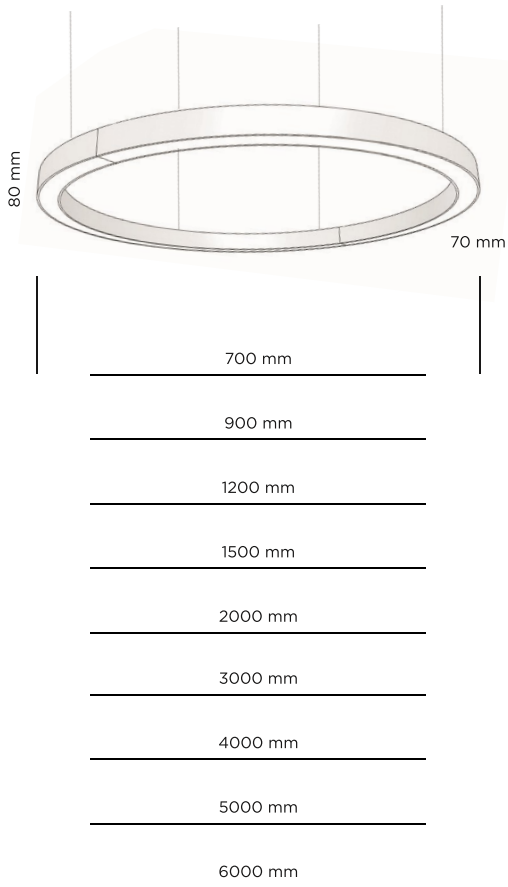

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/GI700	700	29	4690/4970
SBS/GI900	900	37	6030/6390
SBS/GI1220	1200	50	8040/8520
SBS/GI1500	1500	66	10720/11360
SBS/GI2000	2000	82	13400/14200
SBS/GI3000	3000	132	21440/22720
SBS/GI4000	4000	164	26800/28400
SBS/GI5000	5000	230	37520/39760
SBS/GI6000	6000	263	42880/45400

DIRECT/INDIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/GI700/DI	700	29	4690/4970
SBS/GI900/DI	900	37	6030/6390
SBS/GI1220/DI	1200	50	8040/8520
SBS/GI1500/DI	1500	66	10720/11360
SBS/GI2000/DI	2000	82	13400/14200
SBS/GI3000/DI	3000	132	21440/22720
SBS/GI4000/DI	4000	164	26800/28400
SBS/GI5000/DI	5000	230	37520/39760
SBS/GI6000/DI	6000	263	42880/45400

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P


DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

Delivered incl. 2 m self-locking suspensions

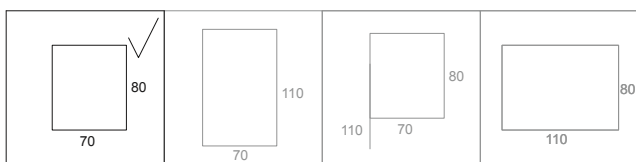

ACCESSORIES

	SPPKBO3075 (3X0,75)
	SPPKBO5075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX