


□ BELO_GI_70/80 SUSPENDED



ARCHILIGHT



INSTALLATION

Suspended version
Ceiling version see page 102
Recessed version see page 168

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION



Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

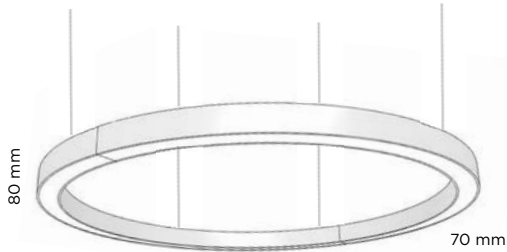

- _____ SBS/GI500
- _____ SBS/GI700
- _____ SBS/GI900
- _____ SBS/GI1220
- _____ SBS/GI1500
- _____ SBS/GI2000
- _____ SBS/GI2500
- _____ SBS/GI3000
- _____ SBS/GI4000
- _____ SBS/GI5000
- _____ SBS/GI6000

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/GI500	540	24	3200/3350
SBS/GI700	708	29	4690/4970
SBS/GI900	898	37	6030/6390
SBS/GI1220	1170	50	8040/8520
SBS/GI1500	1450	66	10720/11360
SBS/GI2000	1900	82	13400/14200
SBS/GI2500	2423	99	16080/17040
SBS/GI3000	3020	132	21440/22720
SBS/GI4000	4208	164	26800/28400
SBS/GI5000	5096	230	37520/39760
SBS/GI6000	5817	263	42880/45400

DIRECT/ INDIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/GI500/DI	540	24	3200/3350
SBS/GI700/DI	708	29	4690/4970
SBS/GI900/DI	898	37	6030/6390
SBS/GI1220/DI	1170	50	8040/8520
SBS/GI1500/DI	1450	66	10720/11360
SBS/GI2000/DI	1900	82	13400/14200
SBS/GI2500/DI	2423	99	16080/17040
SBS/GI3000/DI	3020	132	21440/22720
SBS/GI4000/DI	4208	164	26800/28400
SBS/GI5000/DI	5096	230	37520/39760
SBS/GI6000/DI	5817	263	42880/45400

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P


DIMMABLE OPTIONS

DALI /DALI
SWITCH DIMMABLE /SWD
WIRELESS DIMMABLE /WRS

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

Delivered incl. 2 m self-locking suspensions

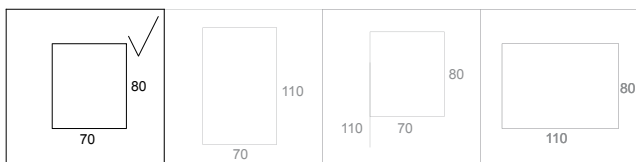

see page 18

see page 20

see page 24

ACCESSORIES

- SPPKBO3075 (3X0,75)
- SPPKBO5075 (5X0,75)
- TRANSPARENT CABLE 2 METRES WITH CEILING BOX