
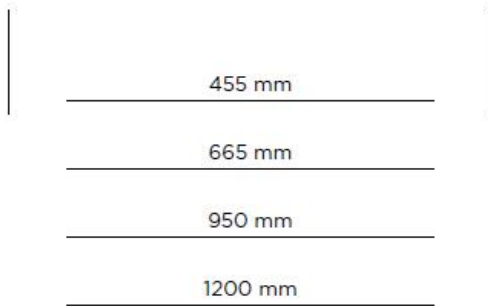


Belo_GI_75/110

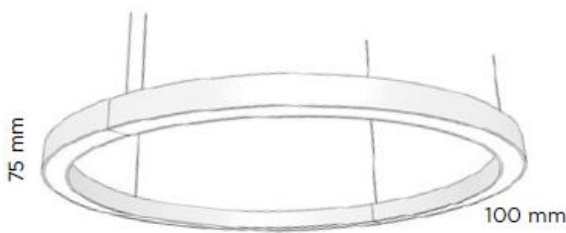

Installation

Pendant or surface mounted version.

Connection

Non dimmable luminaire are equipped by 3-pole terminal block

Luminaires for dimming are delivered with 5-pole terminal block

Material

The body of the luminaire is curved extruded aluminium, powder coated finish

Light source

LED Tridonic or TCI, min. 125lm/W, 3000K or 4000K

Diffuser

PMMA acryl satine

Light distribution

Direct symmetrical

Emergency lighting


There is a unit with integrated emergency unit

Dimming

Most models can be equipped by ballast for dimming (touch. Dim, DALI)



CODE	L mm	W	Lm 3000K/4000K
SBS/GI455	455	22	2400/2640
SBS/GI665	665	32	3600/3960
SBS/GI950	950	48	5400/5940
SBS/GI1200	1200	64	7200/7920



SPPKB3075 (3X0,75)
SPPKB5075 (5X0,75)
TRANSPARENT CABLE 2M
WITH CEILING BOX



SPPKB3075/RED (3X0,75)
SPPKB5075/RED (5X0,75)
RED CABLE 2M
WITH CEILING BOX

MODEL		
CEILING SBC/110/GI	SUSPENDED SBS/110/GI	
FINISH		
WHITE /WH	BLACK /BL	SILVER /SI
COLOR TEMPERATURE		
3000K /3K	4000K /4K	
LIGHT CONTROL		
ON/OFF /-	DALI /dali	
OPTIC		
PMMA /-		