

Belo_GI_75/70



Installation

Pendant or surface mounted version.

Connection

Non dimmable luminaire are equipped by 3-pole terminal block

Luminaires for dimming are delivered with 5-pole terminal block

Material

The body of the luminaire is curved extruded aluminium, powder coated finish

Light source

LED Tridonic or TCI, min. 125Lm/W, 3000K or 4000K

Diffuser

PMMA acryl satine

Light distribution

Direct symmetrical

Emergency lighting


There is a unit with integrated emergency unit

Dimming




Most models can be equipped by ballast for dimming (touch. Dim, DALI)

Accessories

Installation fittings and supplementary details, see accessories

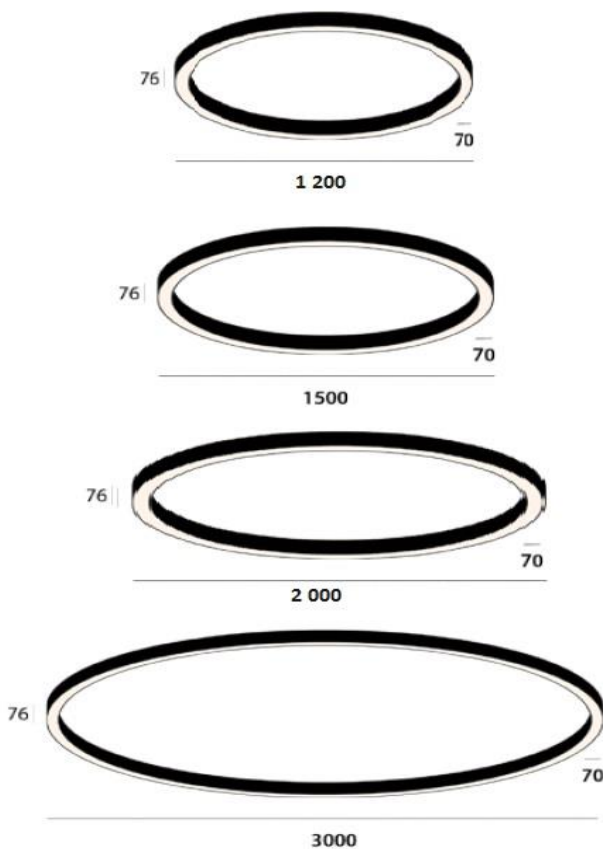

Luminaire dimensions (mm)

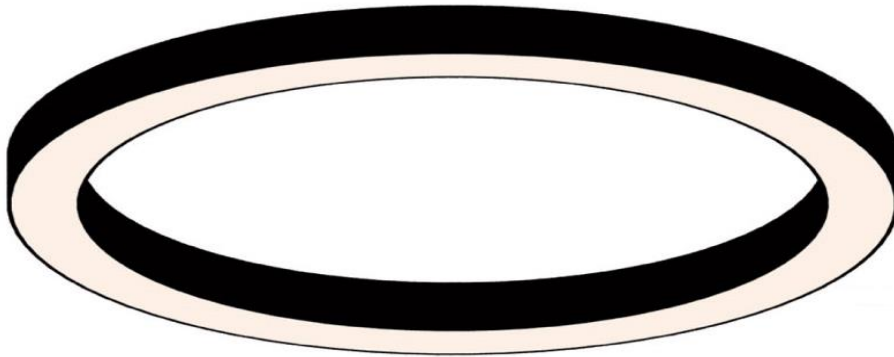

pendant

surface mounted

SBS/GI3000/4K/WH*	SBC/GI3000/4K/WH*	white	3000x70x76mm, 21120Lm/176W/4K
SBS/GI3000/3K/WH*	SBC/GI3000/3K/WH*	white	3000x70x76mm, 19200Lm/176W/3K
SBS/GI2000/4K/WH*	SBC/GI2000/4K/WH*	white	2000x70x76mm, 13200Lm/106W/4K
SBS/GI2000/3K/WH*	SBC/GI2000/3K/WH*	white	2000x70x76mm, 12000Lm/106W/3K
SBS/GI1500/4K/WH*	SBC/GI1500/4K/WH*	white	1500x70x76mm, 10560Lm/88W/4K
SBS/GI1500/3K/WH*	SBC/GI1500/3K/WH*	white	1500x70x76mm, 9600Lm/88W/3K
SBS/GI1200/4K/WH*	SBC/GI1200/4K/WH*	white	1200x110x76mm, 7920Lm/64W/4K
SBS/GI1200/3K/WH*	SBC/GI1200/3K/WH*	white	1200x110x76mm, 7200Lm/64W/3K

* WH=white, BL=black, SI=silver

