
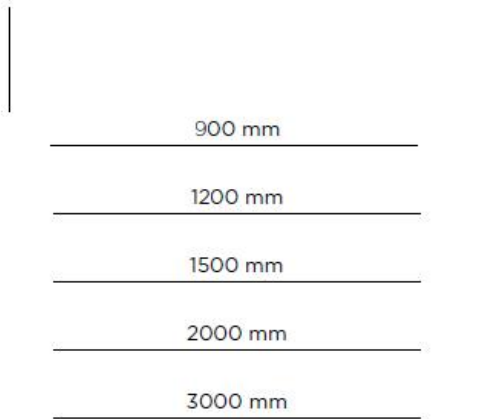


# Belo\_GI\_75/70

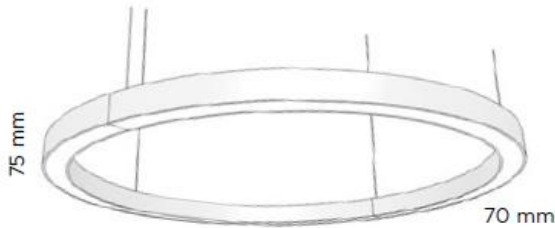

## Installation

Pendant or surface mounted version.

## Connection

Non dimmable luminaire are equipped by 3-pole terminal block

Luminaires for dimming are delivered with 5-pole terminal block

## Material

The body of the luminaire is curved extruded aluminium, powder coated finish

## Light source

LED Tridonic or TCI, min. 125Lm/W, 3000K or 4000K

## Diffuser

PMMA acryl satine

## Light distribution

Direct symmetrical

## Emergency lighting

There is a unit with integrated emergency unit

## Dimming

Most models can be equipped by ballast for dimming (touch. Dim, DALI)



CODE	L mm	W	Lm 3000K/4000K
SBS/GI900	900	39	5670/5940
SBS/GI1200	1200	64	7200/7920
SBS/GI1500	1500	88	9600/10560
SBS/GI2000	2000	106	12000/13200
SBS/GI3000	3000	176	19200/21120

## ACCESSORIES



SPPKB3075 (3X0,75)  
SPPKB5075 (5X0,75)  
TRANSPARENT CABLE 2M  
WITH CEILING BOX



SPPKB3075/RED (3X0,75)  
SPPKB5075/RED (5X0,75)  
RED CABLE 2M  
WITH CEILING BOX

MODEL		
CEILING SBC/GI	SUSPENDEED SBS/GI	
FINISH		
WHITE /WH	BLACK /BL	SILVER /SI
COLOR TEMPERATURE		
3000K /3K	4000K /4K	
LIGHT CONTROL		
ON/OFF /-	DALI /dali	
OPTIC		
PMMA /-		