


□ BELO_LO_FLOWERS SUSPENDED



ARCHILIGHT



INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER


PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

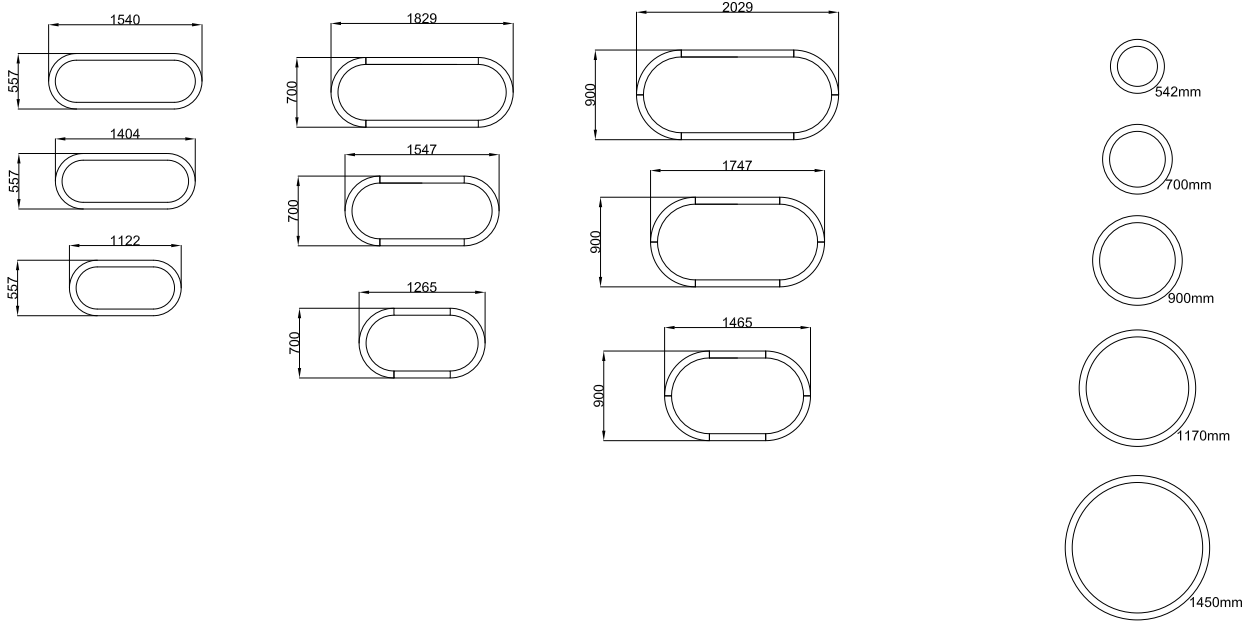


OVALS

CODE	mm	W	Lm (light source)
SBS/80/FLOW/OV/557/1540	557x1540	49	8328/7956
SBS/80/FLOW/OV/557/1404	557x1404	45	7634/7293
SBS/80/FLOW/OV/557/1122	557x1122	36	6246/5967
SBS/80/FLOW/OV/700/1829	700x1829	62	10650/10050
SBS/80/FLOW/OV/700/1547	700x1547	54	9230/8710
SBS/80/FLOW/OV/700/1265	700x1265	47	7650/7210
SBS/80/FLOW/OV/900/2029	900x2029	73	11750/11190
SBS/80/FLOW/OV/900/1747	900x1747	62	10650/10050
SBS/80/FLOW/OV/900/1465	900x1465	55	9070/8550

RINGS

CODE	mm	W	Lm (light source)
SBS/FLOW/GI500	542	21	3350/3150
SBS/FLOW/GI700	700	39	4970/4690
SBS/FLOW/GI900	900	37	6390/6030
SBS/FLOW/GI1220	1170	50	8520/8040
SBS/FLOW/GI1450	1450	66	11360/10720

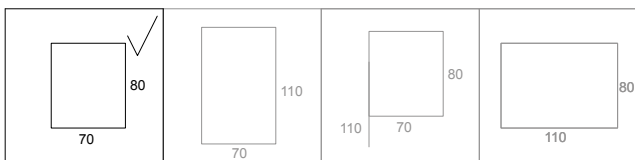

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI /DALI
SWITCH DIMMABLE /SWD
WIRELESS DIMMABLE /WRS

Delivered incl. 2 m self-locking suspensions

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

- 80 SPPKBO3075 (3X0,75)
- 110 SPPKBO5075 (5X0,75)
- 25 TRANSPARENT CABLE 2 METRES WITH CEILING BOX