



□ BELO_LO_PO_80 CEILING

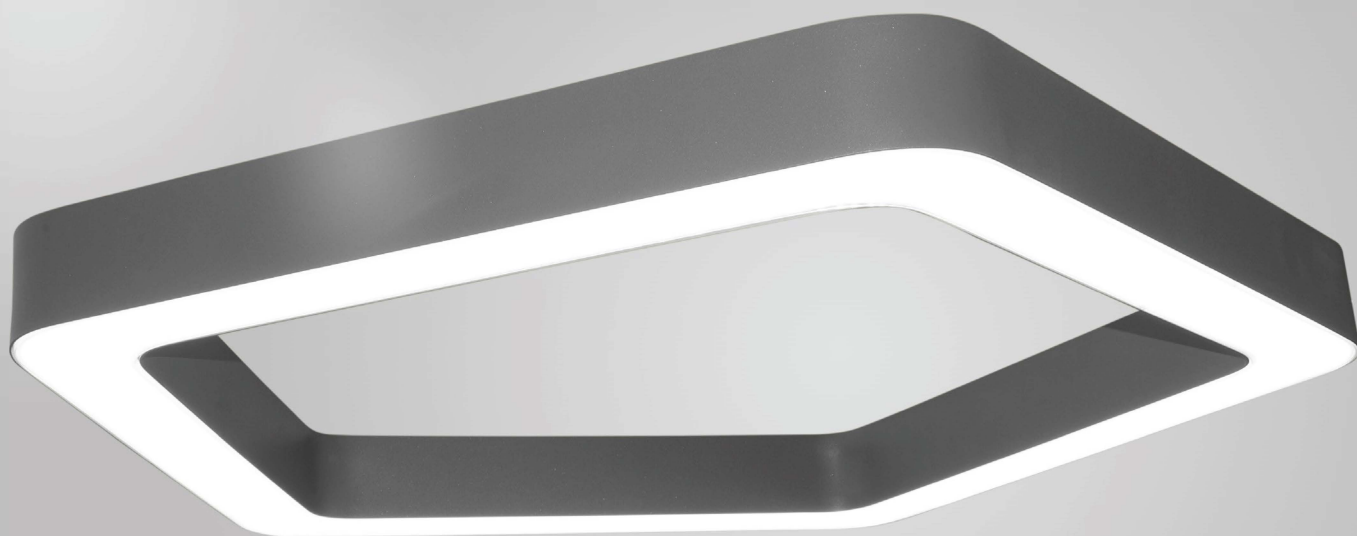

ARCHILIGHT

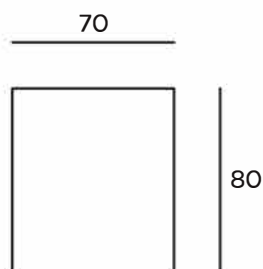

INSTALLATION

Ceiling version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

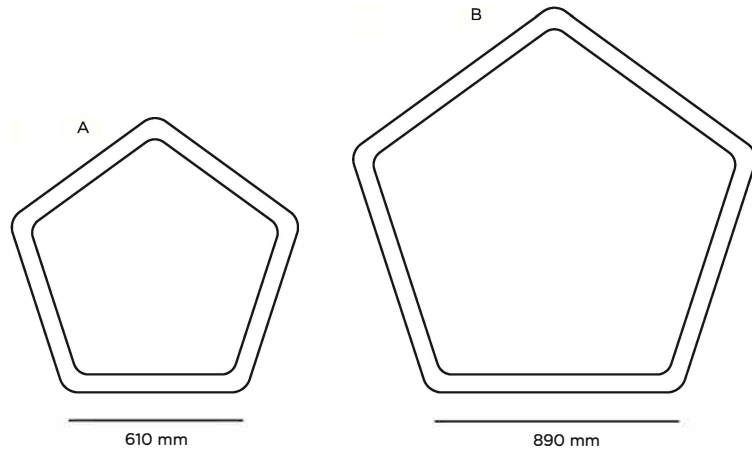

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/80/PO/A	610x80	41	6700/7100
SBC/80/PO/B	890x80	62	10050/10650

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI
WIRELESS	/WRS

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR