

# □ BELO\_LO\_S\_80 CEILING



## INSTALLATION

Ceiling version

## CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block  
Luminaires for dimming are delivered with 5-pole terminal block

## MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

## LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

## DIFFUSER

PMMA OPAL  
PRISMATIC

## LIGHT DISTRIBUTION


Direct symmetrical


## EMERGENCY LIGHTING

A unit with integrated emergency is an option

## DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)



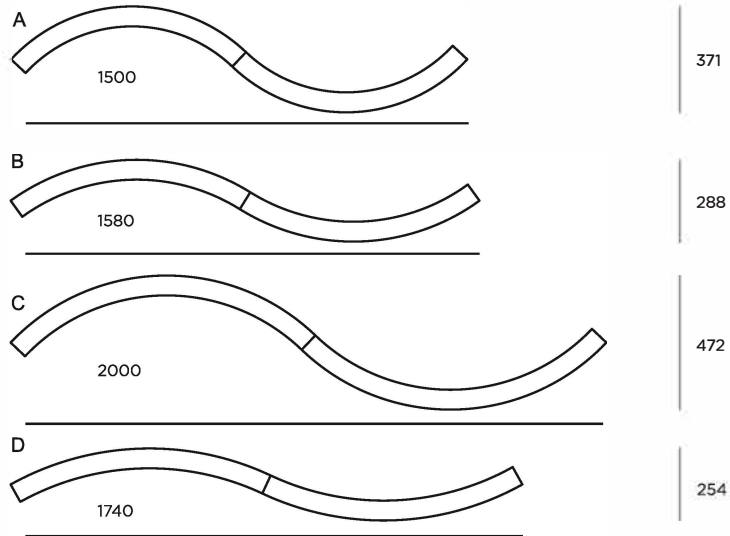

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/80/LO/SA	1500x1200x80	26	4020/4260
SBC/80/LO/SB	1580x1500x80	26	4020/4260
SBC/80/LO/SC	2000x1500x80	33	5360/5680
SBC/80/LO/SD	1740x2000x80	26	4020/4260

#### COLOR TEMPERATURE

3000K /3K  
4000K /4K


#### OPTIC

PMMA OPAL /--  
PRISMATIC /P

#### DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI  
WIRELESS /WRS

#### ACCESSORIES



#### COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR