



□ BELO LOS 80 RECESSED

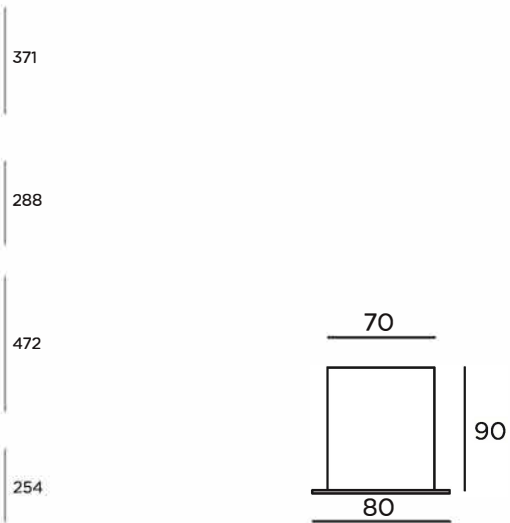

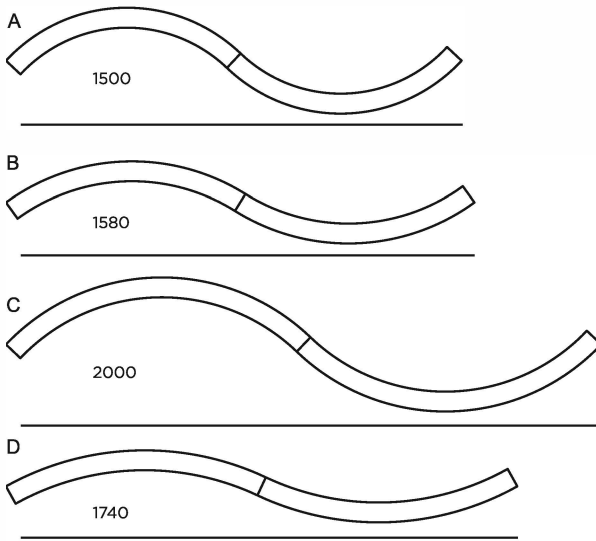

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBV/LO/SA	1500x80x90 (D=1200)	26	4020/4260
SBV/LO/SB	1580x80x90 (D=1500)	26	4020/4260
SBV/LO/SC	2000x80x90 (D=1500)	33	5360/5680
SBV/LO/SD	1740x80x90 (D=2000)	26	4020/4260

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI
WIRELESS	/WRS

INSTALLATION

Recessed version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

