


□ BELO_LO_SKY SUSPENDED



ARCHILIGHT



INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER



PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

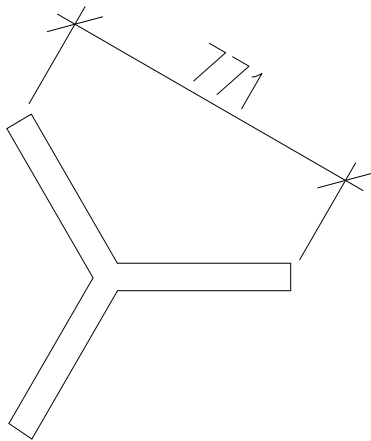

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS


DALI /DALI
SWITCH DIMMABLE /SWD
WIRELESS DIMMABLE /WRS

Delivered incl. 2 m self-locking suspensions

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

CODE	mm	W	Lm (light source)
SBS/80/SKY	770x770	21	3200/3010

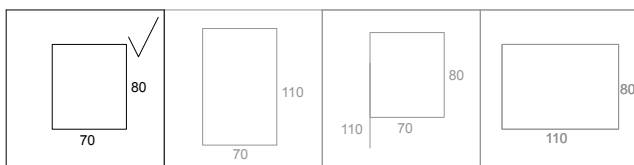

ACCESSORIES

	SPPKBO3075 (3X0,75)
	SPPKBO5075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX