

□ BELO_LO_SQ_80 CEILING



INSTALLATION

Ceiling version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option



DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

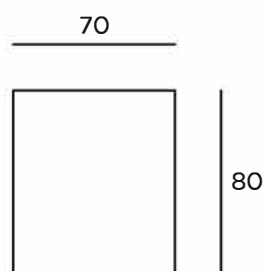



- A 1225 _____
- B 1507 _____
- C 1789 _____
- D 2071 _____

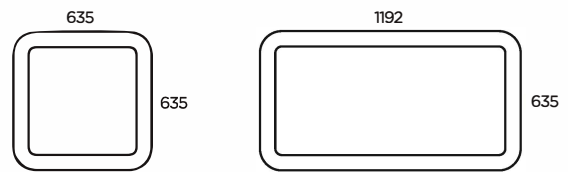

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/80/SQ/600	635x635x80	33	5360/5680
SBC/80/SQ/1200	1192x635x80	50	8040/8520
SBC/80/SQ/AA	1225x1225x80	66	10720/11360
SBC/80/SQ/AB	1225x1507x80	74	12060/12780
SBC/80/SQ/AC	1225x1789x80	81	13400/14200
SBC/80/SQ/AD	1225x2071x80	91	14740/15620
SBC/80/SQ/BB	1507x1507x80	81	13400/14200
SBC/80/SQ/BC	1507x1789x80	91	14740/15620
SBC/80/SQ/BD	1507x2071x80	98	16080/17040
SBC/80/SQ/CC	1789x1789x80	98	16080/17040
SBC/80/SQ/CD	1789x2071x80	114	17420/18460
SBC/80/SQ/DD	2071x2071x80	115	18760/19880

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR