






□ BELO\_LO\_SQ\_80 RECESSED



ARCHILIGHT

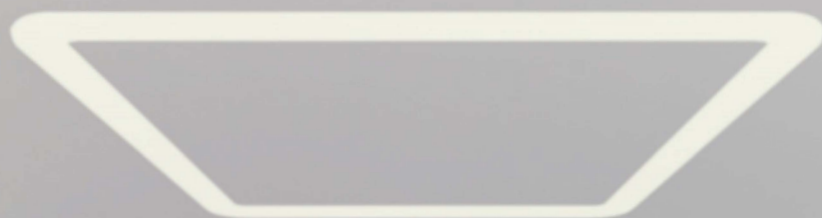

A	1225
B	1507
C	1789
D	2071

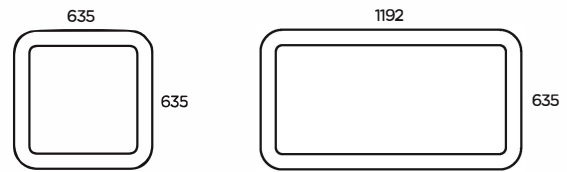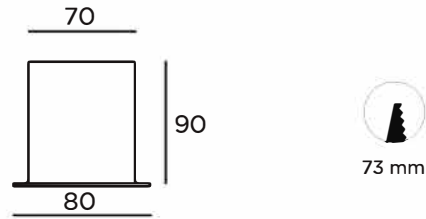

## INSTALLATION

Recessed version

## CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block  
Luminaires for dimming are delivered with 5-pole terminal block

## MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

## LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

## DIFFUSER

PMMA OPAL  
PRISMATIC

## LIGHT DISTRIBUTION

Direct symmetrical

## EMERGENCY LIGHTING

A unit with integrated emergency is an option

## DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

## COLOR TEMPERATURE

3000K	/3K
4000K	/4K

## OPTIC

PMMA OPAL	/--
PRISMATIC	/P

## DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI
WIRELESS	/WRS

## COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBV/LO/SQ/AA	1225x1225x80	66	10720/11360
SBV/LO/SQ/AB	1225x1507x80	74	12060/12780
SBV/LO/SQ/AC	1225x1789x80	81	13400/14200
SBV/LO/SQ/AD	1225x2071x80	91	14740/15620
SBV/LO/SQ/BB	1507x1507x80	81	13400/14200
SBV/LO/SQ/BC	1507x1789x80	91	14740/15620
SBV/LO/SQ/BD	1507x2071x80	98	16080/17040
SBV/LO/SQ/CC	1789x1789x80	98	16080/17040
SBV/LO/SQ/CD	1789x2071x80	114	17420/18460
SBV/LO/SQ/DD	2071x2071x80	115	18760/19880

## ACCESSORIES

