


□ BELO\_LO\_TR\_80 RECESSED



ARCHILIGHT



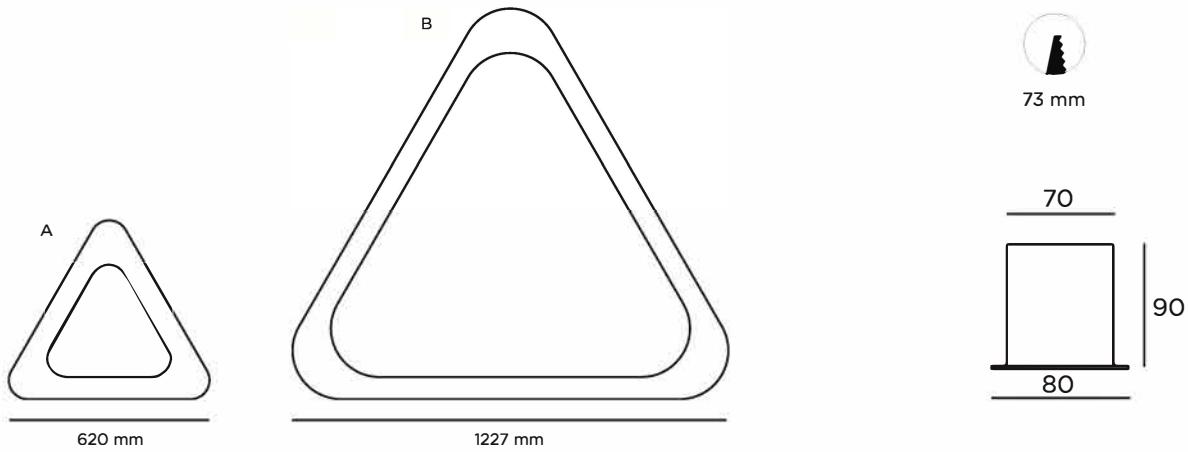

## INSTALLATION

Recessed version

## CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block  
Luminaires for dimming are delivered with 5-pole terminal block

## MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

## LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

## DIFFUSER

PMMA OPAL  
PRISMATIC

## LIGHT DISTRIBUTION

Direct symmetrical

## EMERGENCY LIGHTING

A unit with integrated emergency is an option

## DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

| DIRECT CODE | (mm)    | W  | Lm from 3000K/4000K |
|-------------|---------|----|---------------------|
| SBV/LO/TR/A | 620x80  | 25 | 4020/4260           |
| SBV/LO/TR/B | 1227x80 | 58 | 9380/9940           |

## COLOR TEMPERATURE

3000K /3K  
4000K /4K

## OPTIC

PMMA OPAL /--  
PRISMATIC /P

## DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI  
WIRELESS /WRS

## COLORS

|  |          |     |
|--|----------|-----|
|  | WHITE    | /WH |
|  | BLACK    | /BL |
|  | SILVER   | /SI |
|  | ANTRACIT | /AT |
|  | GOLD     | /GL |
|  | BRONZE   | /BR |