

INSTALLATION

- › ceiling
- › suspended

CONNECTION

- › 3 - pole terminal block (non DIM)
- › 5 - pole terminal block (DIM)

MATERIAL

- › curved extruded aluminium

FINISHING

- › powder coated

LIGHT SOURCE

- › LED Tridonic, min. 160Lm/W

COLOUR TEMPERATURE

- › 3000K
- › 4000K

DIFFUSER

- › PMMA acryl satine

LIGHT DISTRIBUTION

- › direct symmetrical

MATERIAL COLOUR

- › white
- › silver
- › black
- › another colours on request


CONTROL

- › non DIM
- › switchDIM
- › DALI

ACCESSORIES

- › installation fittings and supplementary
- › details see accessories

□ BELO_LO

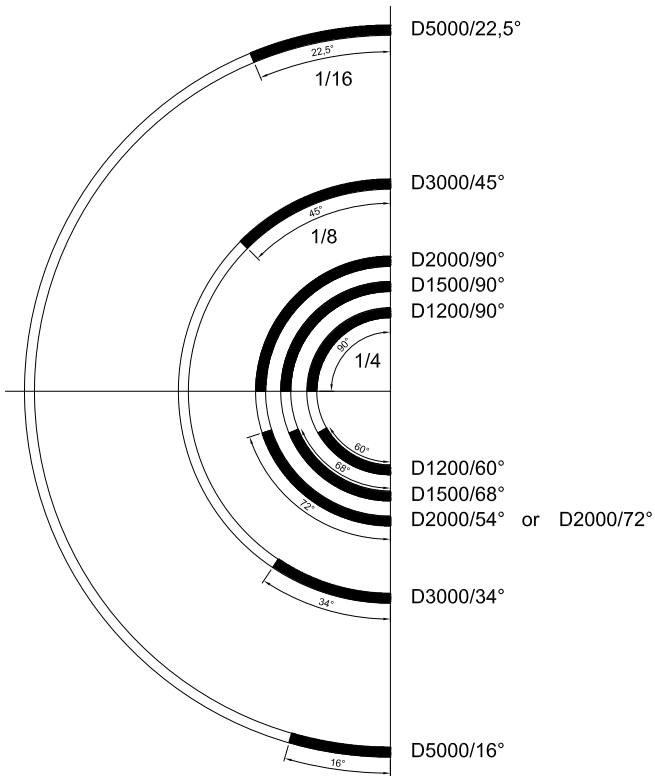

Belo_LO

CODE	W	Lm 3000 K / 4000 K
SBC/LO/5000/22,5°	14	2170 / 2310
SBC/LO/3000/45°	16	2480 / 2640
SBC/LO/2000/90°	20	3100 / 3300
SBC/LO/1500/90°	16	2480 / 2640
SBC/LO/1200/90°	12	1860 / 1980
SBC/LO/1200/60°	8	1240 / 1320
SBC/LO/1500/68°	12	1860 / 1980
SBC/LO/2000/54°	12	1860 / 1980
SBC/LO/2000/72°	16	2480 / 2640
SBC/LO/3000/34°	12	1860 / 1980
SBC/LO/5000/16°	10	1550 / 1650
SBC/LO/0000/1411	20	3100 / 3300
SBC/LO/0000/1129	16	2480 / 2640
SBC/LO/0000/847	12	1860 / 1980
SBC/LO/0000/565	8	1240 / 1320

ACCESSORIES


END CAP 2 pcs.



DIRECT CONNECTOR



TRANSPARENT CABLE 2m incl. CEILING BOX

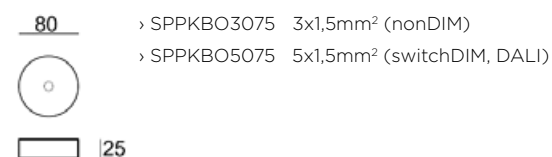

EXAMPLE OF COMPLETE CODE:

SBC/LO/1200/60°/4K/WH/DALI
 › SBC ceiling, SBS suspended
 › 1200 diameter
 › 4K 4000K, 3K 3000K
 › WH white, BL black, SI silver
 › DALI dali, SDIM switchdim



