


□ BELO_QA_80 SUSPENDED

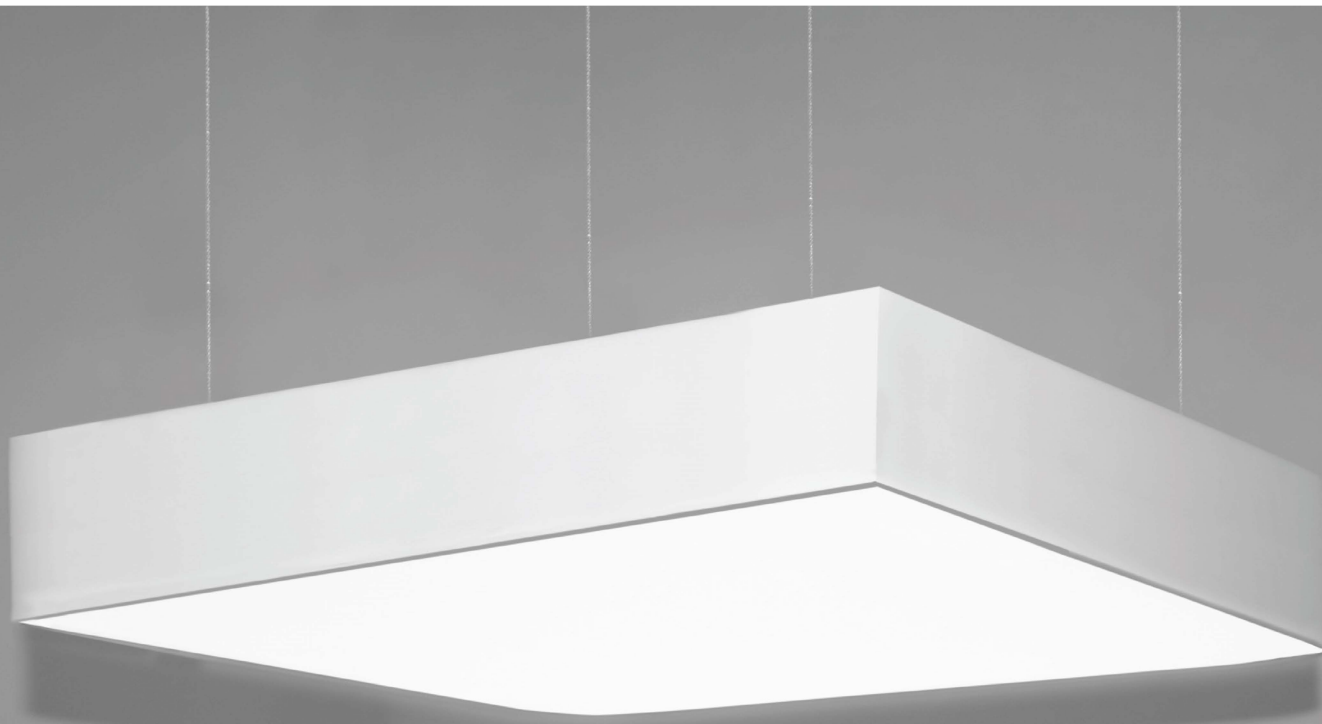

INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical

EMERGENCY LIGHTING



A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)




80



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/QA/330	330x330x50	8	1340/1400
SBS/80/QA/570	570x570x50	32	5360/5600
SBS/80/QA/850	850x850x50	72	11160/12600

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/QA/330/DI	330x330x50	8	1340/1400
SBS/80/QA/570/DI	570x570x50	32	5360/5600
SBS/80/QA/850/DI	850x850x50	72	11160/12600

Delivered incl. 2 m self-locking suspensions

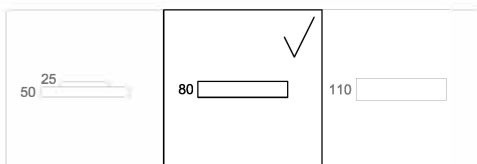

INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

	75	SPPKB3075 (3X0,75)
	75	SPPKB5075 (5X0,75) TRANSPARENT CABLE 2 METRES WITH CEILING BOX
	25	