



# □ CUBUS\_R WALL



ARCHILIGHT



140

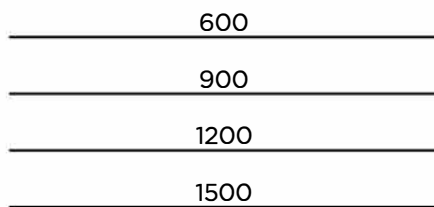



## INSTALLATION

Wall version

## CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block  
Luminaires for dimming are delivered with 5-pole terminal block

## MATERIAL

The body of the luminaire is extruded aluminium,  
powder coated finish

## LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

## DIFFUSER

PMMA OPAL  
PRISMATIC

## LIGHT DISTRIBUTION

Direct symmetrical  
Direct symmetrical / Passive indirect symmetrical

## EMERGENCY LIGHTING

A unit with integrated emergency is an option

## DIMMING

Most models can be delivered with ballast  
for dimming (TOUCHDIM, DALI)

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCWR130	600x140x80	16	2680/2840
SCWR250	600x140x80	24	3720/3920
SCWR195	900x140x80	26	4020/4260
SCWR375	900x140x80	37	5580/5880
SCWR260	1200x140x80	33	5360/5680
SCWR500	1200x140x80	49	7440/7840
SCWR325	1500x140x80	41	6700/7100
SCWR625	1500x140x80	61	9300/9800

DIRECT/ INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCWR130/DI	600x140x80	16	2680/2840
SCWR250/DI	600x140x80	24	3720/3920
SCWR195/DI	900x140x80	26	4020/4260
SCWR375/DI	900x140x80	37	5580/5880
SCWR260/DI	1200x140x80	33	5360/5680
SCWR500/DI	1200x140x80	49	7440/7840
SCWR325/DI	1500x140x80	41	6700/7100
SCWR625/DI	1500x140x80	61	9300/9800

## COLOR TEMPERATURE

3000K /3K  
4000K /4K

## OPTIC

PMMA OPAL /--  
PRISMATIC /P

## DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI  
WIRELESS /WRS

## COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR