


□ CUBUS_R SUSPENDED



ARCHILIGHT

140

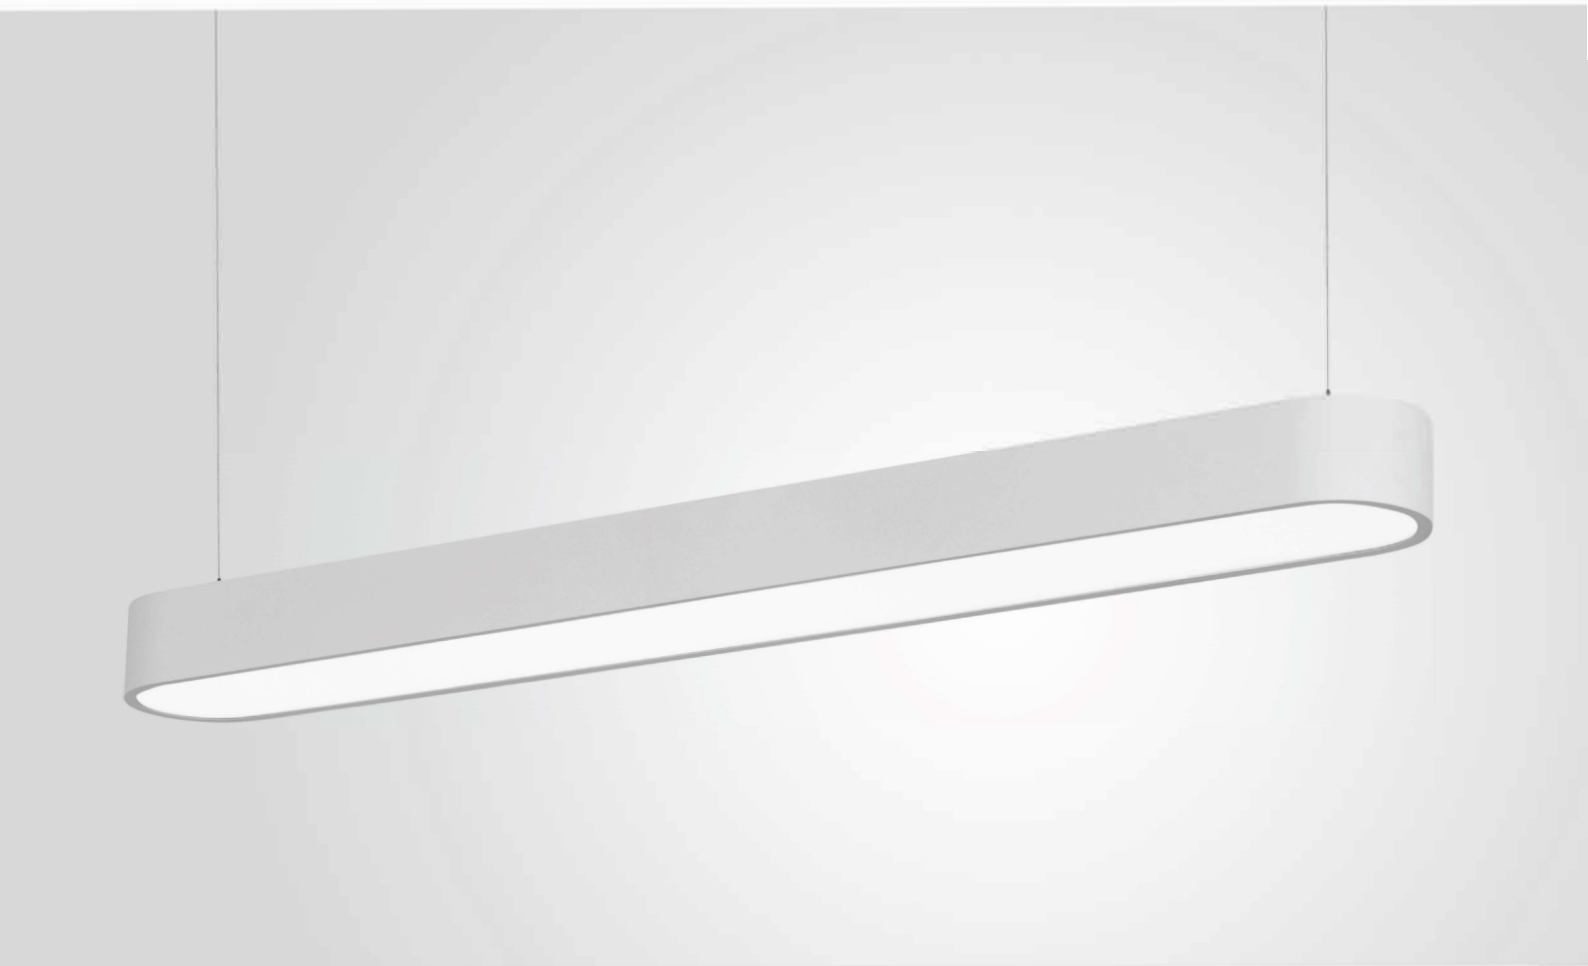

80




600

900

1200

1500



INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCSR130	600x140x80	16	2680/2840
SCSR250	600x140x80	24	3720/3920
SCSR195	900x140x80	26	4020/4260
SCSR375	900x140x80	37	5580/5880
SCSR260	1200x140x80	33	5360/5680
SCSR500	1200x140x80	49	7440/7840
SCSR325	1500x140x80	41	6700/7100
SCSR625	1500x140x80	61	9300/9800

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCSR130/DI	600x140x80	16	2680/2840
SCSR250/DI	600x140x80	24	3720/3920
SCSR195/DI	900x140x80	26	4020/4260
SCSR375/DI	900x140x80	37	5580/5880
SCSR260/DI	1200x140x80	33	5360/5680
SCSR500/DI	1200x140x80	49	7440/7840
SCSR325/DI	1500x140x80	41	6700/7100
SCSR625/DI	1500x140x80	61	9300/9800

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACITE	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	SPPKB03075 (3X0,75)
	SPPKB05075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX

Delivered incl. 2 m self-locking suspensions

125