


□ CUBUS ROTARY WALL



703 mm
978 mm
1263 mm
1543 mm

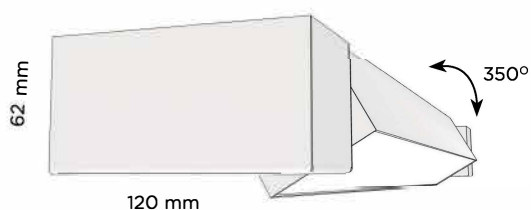

ARCHILIGHT

INSTALLATION

Wall version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium,
eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / active indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)

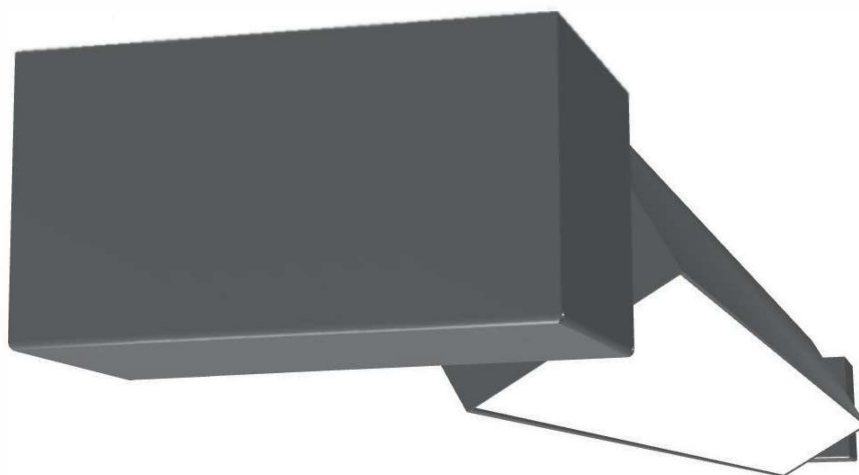

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC




PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCRW130LED	703	9	1260/1340
SCRW250LED	703	17	2100/2260
SCRW195LED	978	13	1890/2010
SCRW375LED	978	26	3150/3390
SCRW260LED	1263	18	2520/2680
SCRW500LED	1263	34	4200/4520
SCRW325LED	1543	22	3150/3350
SCRW625LED	1543	43	5250/5650

COLORS

	ELOX	/...
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

