



# □ CUBUS SQUARE CEILING



ARCHILIGHT

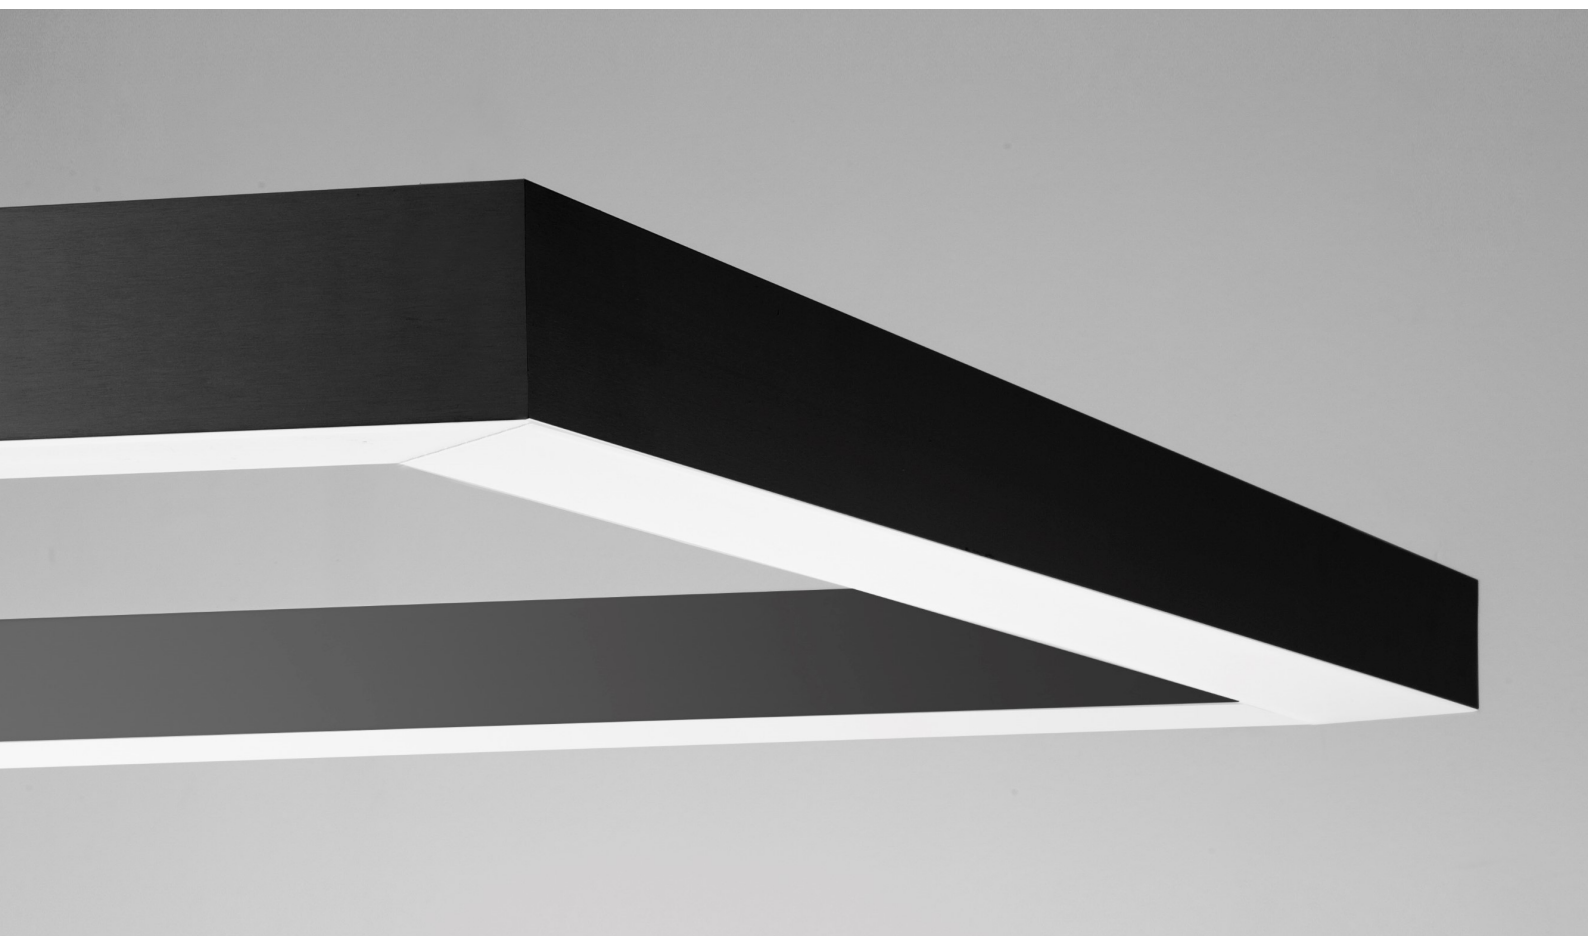



## INSTALLATION

Ceiling version

## CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block  
Luminaires for dimming are delivered with 5-pole terminal block

## MATERIAL

The body of the luminaire is extruded aluminium,  
powder coated finish

## LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

## DIFFUSER

PMMA OPAL  
PRISMATIC

## LIGHT DISTRIBUTION

Direct symmetrical

## EMERGENCY LIGHTING

A unit with integrated emergency is an option

## DIMMING

Most models can be delivered with ballast  
for dimming (TOUCHDIM, DALI)

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCCQ130	630x630x62	33	5360/5680
SCCQ195	915x915x62	49	8040/8520

## COLOR TEMPERATURE

3000K /3K  
4000K /4K






## OPTIC

PMMA OPAL /--  
PRISMATIC /P

## DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI  
WIRELESS /WRS

## COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR