



□ CUBUS\_XL CEILING



ARCHILIGHT

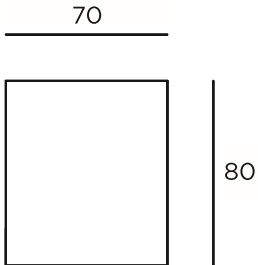

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCCXL60	595x70x80	9	1340/1420
SCCXL90	850x70x80	13	2010/2130
SCCXL120	1135x70x80	17	2680/2840
SCCXL150	1415x70x80	21	3350/3550
SCCXL170	1700x70x80	26	4020/4260
SCCXL200	1980x70x80	29	4690/4970
SCCXL230	2265x70x80	33	5360/5680
SCCXL280	2825x70x80	41	6700/7100

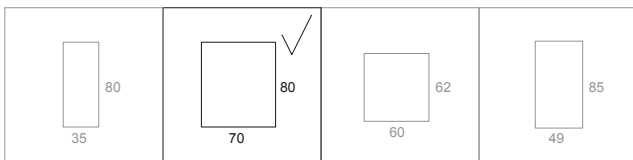

## INSTALLATION

Ceiling version

## CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block  
Luminaires for dimming are delivered with 5-pole terminal block

## MATERIAL

The body of the luminaire is extruded aluminium, powder coated finish

## LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

## DIFFUSER

PMMA OPAL  
PRISMATIC

## LIGHT DISTRIBUTION

Direct symmetrical

## EMERGENCY LIGHTING

A unit with integrated emergency is an option

## DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

## COLOR TEMPERATURE

3000K /3K  
4000K /4K

## OPTIC

PMMA OPAL /--  
PRISMATIC /P

## DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI  
WIRELESS /WRS

## COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

## ACCESSORIES

