


□ CUBUS XL SUSPENDED, CEILING, WALL, RECESSED



ARCHILIGHT



INSTALLATION

Suspended, ceiling, wall or recessed version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block, through wired
Luminaires for dimming are delivered with 5-pole terminal block, through wired

MATERIAL

The body of the luminaire is extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 125Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING


A unit with integrated emergency is an option

DIMMING


All models can be delivered with ballast for dimming (TOUCHDIM, DALI)

EXAMPLES OF ASSEMBLY CUBUS XL SYSTEM


1. SUSPENDED / CEILING / RECESSED

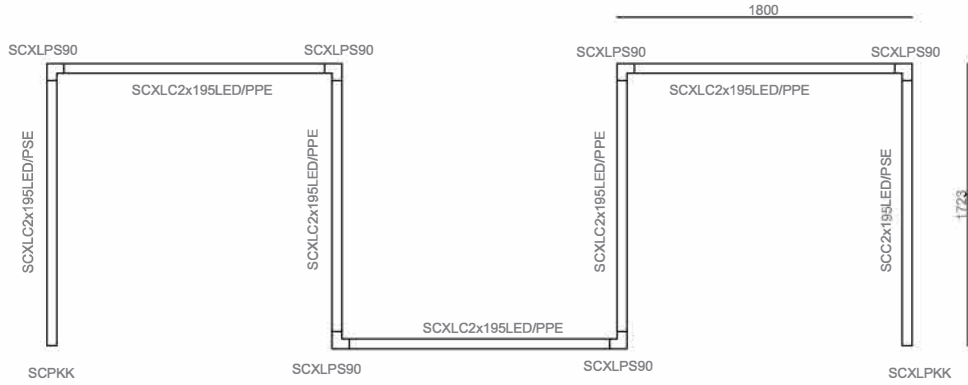


2. SUSPENDED / CEILING / RECESSED

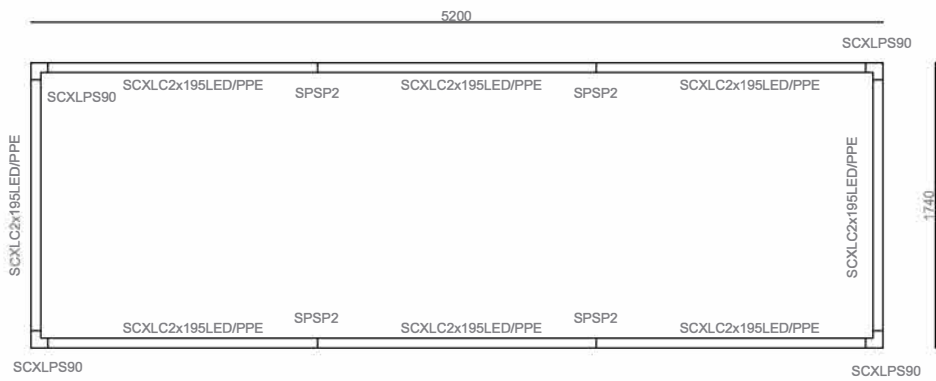

3. SUSPENDED / CEILING / WALL / RECESSED



4. SUSPENDED / CEILING / RECESSED

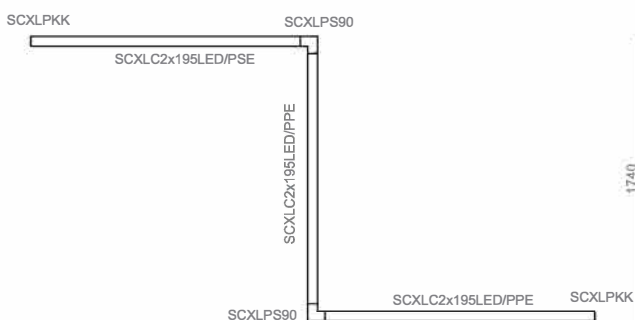


□ CUBUS XL



SUSPENDED, CEILING, WALL



CODE SUSPENDED	CODE CEILING	CODE WALL	L (mm)	W	Lm from 3000K/4000K
SCSXLPPES60	SCCXLPPES60	SCWXLPPES60	595x70x80	9	1340/1420
SCSXLPPES90	SCCXLPPES90	SCWXLPPES90	850x70x80	13	2010/2130
SCSXLPPES120	SCCXLPPES120	SCWXLPPES120	1135x70x80	17	2680/2840
SCSXLPPES150	SCCXLPPES150	SCWXLPPES150	1415x70x80	21	3350/3550
SCSXLPPES170	SCCXLPPES170	SCWXLPPES170	1700x70x80	26	4020/4260
SCSXLPPES200	SCCXLPPES200	SCWXLPPES200	1980x70x80	29	4690/4970
SCSXLPPES230	SCCXLPPES230	SCWXLPPES230	2265x70x80	33	5360/5680
SCSXLPPES280	SCCXLPPES280	SCWXLPPES280	2825x70x80	41	6700/7100



ACCESSORIES

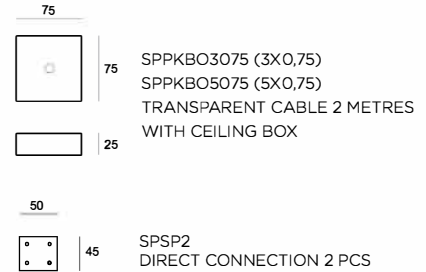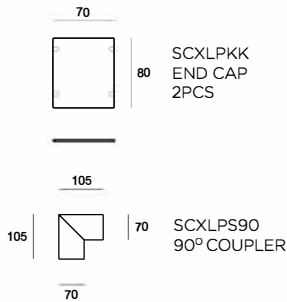


RECESSED




CODE	L (mm)	W	Lm from 3000K/4000K
SCVXLPPES60	595x80x90	9	1340/1420
SCVXLPPES90	850x80x90	13	2010/2130
SCVXLPPES120	1135x80x90	17	2680/2840
SCVXLPPES150	1415x80x90	21	3350/3550
SCVXLPPES170	1700x80x90	26	4020/4260
SCVXLPPES200	1980x90x80	29	4690/4970
SCVXLPPES230	2265x80x90	33	5360/5680
SCVXLPPES280	2825x80x90	41	6700/7100

ARCHILIGHT



ACCESSORIES

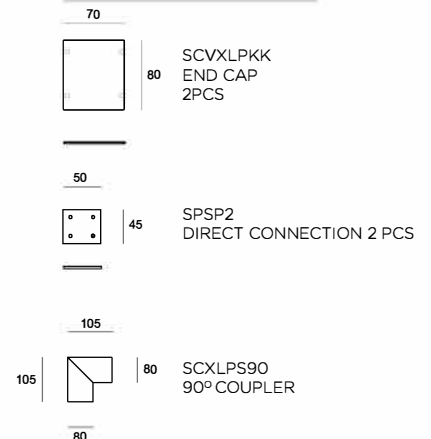

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC


PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

COLORS

	ELOX	/..
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

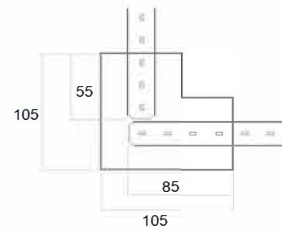

LENGTH of modules for assembly when delivered with SCXLPS90

- 55 mm (for 1 pc SCSP9090) /L1
- 85 mm (for 1 pc SCSP9090) /L2
- 140 mm (for 2 pcs SCSP9090) /L3