



# □ DUAL MINI



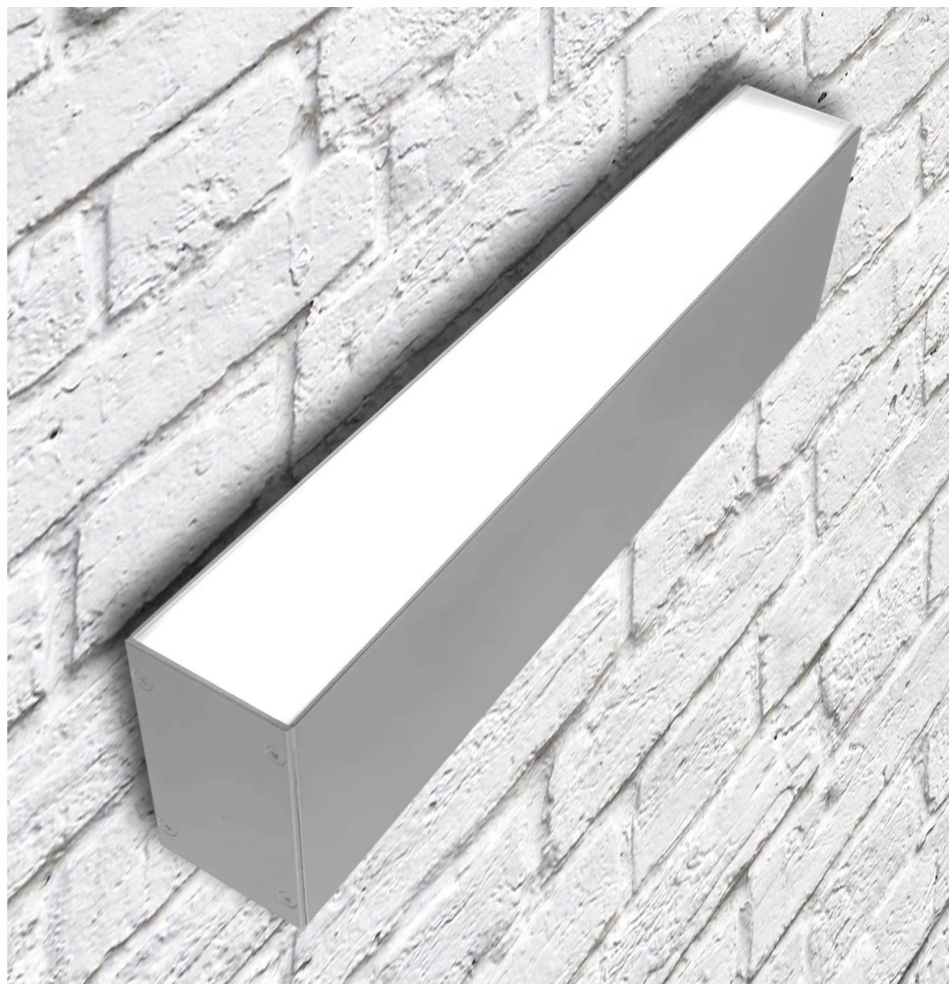

**INSTALLATION**

Wall version

**CONNECTION**

Non dimmable luminaires are delivered with 3-pole terminal block  
Luminaires for dimming are delivered with 5-pole terminal block

**MATERIAL**

The body of the luminaire is extruded aluminium, powder coated finish

**LIGHT SOURCE**

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

**DIFFUSER**

PMMA OPAL  
PRISMATIC

**LIGHT DISTRIBUTION**

Direct symmetrical  
Direct symmetrical / Active indirect symmetrical

**DIMMING**

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SDSM100LED/D	300	8	950/1020


DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SDSM100LED/DI	300	16	1900/2040

COLOR TEMPERATURE	
3000K	/3K
4000K	/4K

OPTIC	
PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS	
DALI, TOUCHDIM	/DALI

**ACCESSORIES**



**COLORS**

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR