



# □ DUAL STAR SUSPENDED

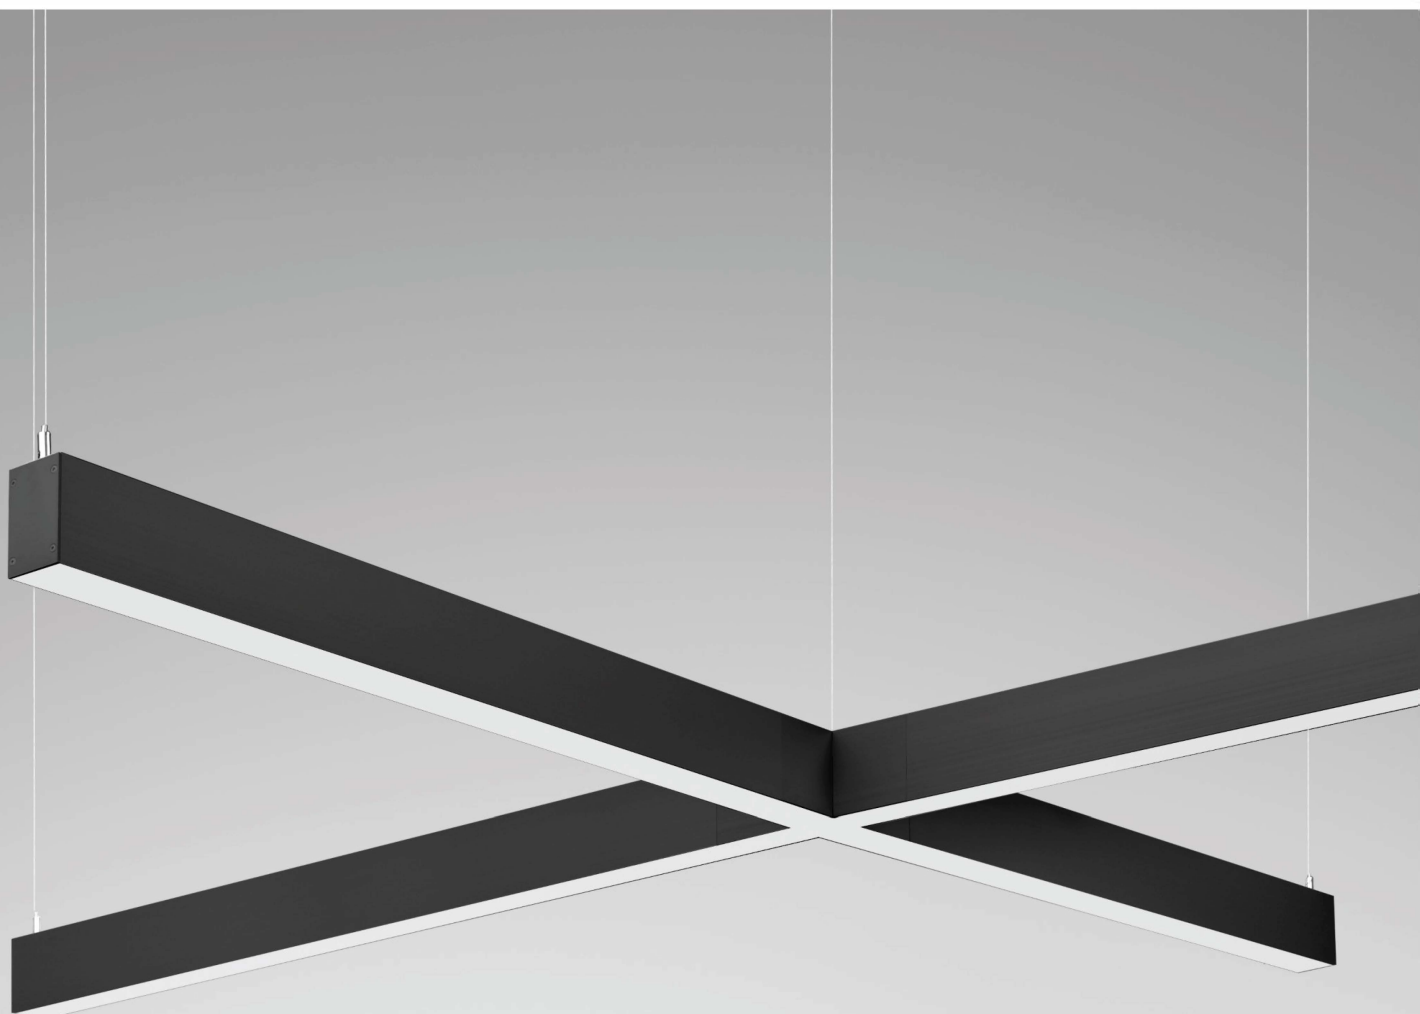

ARCHILIGHT



## INSTALLATION

Suspended version

## CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block  
Luminaires for dimming are delivered with 5-pole terminal block

## MATERIAL

The body of the luminaire is extruded aluminium,  
powder coated finish

## LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

## DIFFUSER

PMMA OPAL  
PRISMATIC

## LIGHT DISTRIBUTION


Direct symmetrical  
Direct symmetrical / active indirect symmetrical

## EMERGENCY LIGHTING

A unit with integrated emergency is an option

## DIMMING

Most models can be delivered with ballast  
for dimming (TOUCHDIM, DALI)

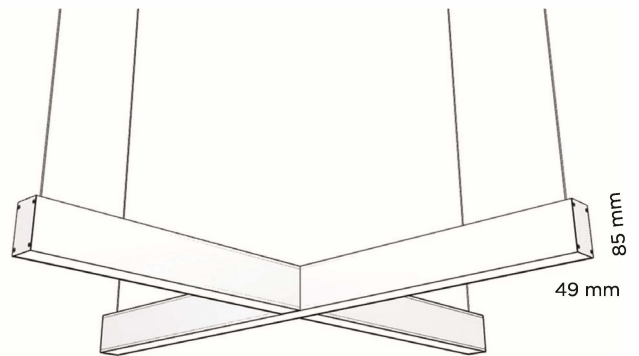

**COLOR TEMPERATURE**

3000K /3K  
4000K /4K

**OPTIC**

PMMA OPAL /--  
PRISMATIC /P

**DIMMABLE OPTIONS**

DALI, TOUCHDIM /DALI  
WIRELESS /WRS

**COLORS**

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SDST130	1200x1200x85	50	8040/8520
SDST250	1200x1200x85	74	11160/11760

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SDST130/DI	1200x1200x85	100	16080/17040

Delivered incl. 2 m self-locking suspensions

**ACCESSORIES**

	75	SPPKBO3075 (3X0,75) SPPKBO5075 (5X0,75) TRANSPARENT CABLE 2 METRES WITH CEILING BOX
	25	