


□ FLAT 200 SUSPENDED



ARCHILIGHT

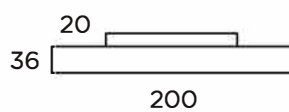

INSTALLATION

Suspended version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL

PRISMATIC

LIGHT DISTRIBUTION



Direct symmetrical
Direct symmetrical / active indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

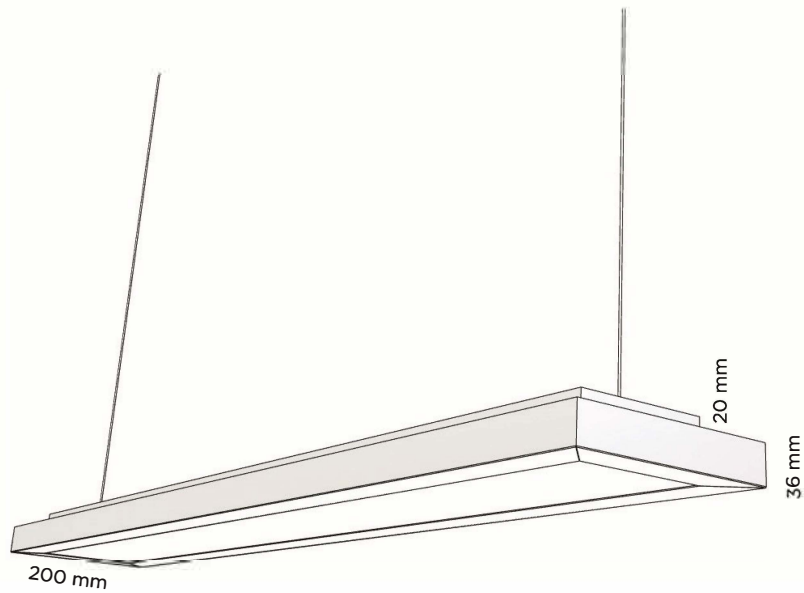

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI
WIRELESS /WRS

| DIRECT CODE | (mm) | W | Lm from 3000K/4000K |
|-------------|-------------|----|---------------------|
| SFS2500 | 1200x200x36 | 33 | 5360/5680 |
| SFS2625 | 1500x200x36 | 41 | 6700/7100 |

| DIRECT/INDIRECT CODE | (mm) | W | Lm from 3000K/4000K |
|----------------------|-------------|----|---------------------|
| SFS2500/DI | 1200x200x36 | 55 | 7110/7820 |
| SFS2625/DI | 1500x200x36 | 62 | 8400/8980 |

Delivered incl. 2 m self-locking suspensions

COLORS

| | | |
|--|----------|------|
| | ELOX | /... |
| | WHITE | /WH |
| | BLACK | /BL |
| | SILVER | /SI |
| | ANTRACIT | /AT |
| | GOLD | /GL |
| | BRONZE | /BR |

ACCESSORIES

| | | |
|--|----|--|
| | 75 | SPPKBO3075 (3X0,75) SPPKBO5075 (5X0,75) |
| | 25 | TRANSPARENT CABLE 2 METRES WITH CEILING BOX |